


SuperPole™ Basic

A floor to ceiling pole suitable for users with mild weakness or impairment of legs who require minimal assistance to transfer and achieve a standing or sitting position.

Features and Benefits

- **Ease of Installation** - Quick and easy to install / relocate. Installs by turning the jackscrew at the bottom of the pole. The screw “expands” the pole to create enough tension between the floor and ceiling to hold the pole “rock solid” secure.
- **No Damage Installation** - Rubber pads on the ceiling plate and the floor plate hold pole secure and prevent marring of floor and ceiling, even stipple ceilings.
- **Stylish** - Clean and modern design will suit any decor.
- **Comfort** - Foam hand grip provides a comfortable gripping surface, particularly useful for those with limited hand strength.
- **Versatile** - Installs anywhere there is a floor and ceiling, placing transfer support directly where it is needed. Use it beside a bed, bath, toilet or chair. Custom ceiling heights available.
- **Add On Kits** - The SuperPole™ also serves as a mounting support for a complete range of options that can be varied to meet changing needs:

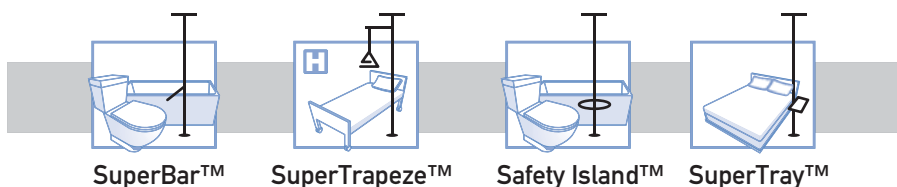

Jackscrew Installation



Technical Specifications:

Floor to Ceiling Range	93" to 99" / 236 to 253 cm (standard).																		
Uni-Fit Extender™	Increase floor to ceiling range from 100" to 120" / 254 to 305 cm. Sold separately. NOT TO BE USED WITH SUPERTRAPEZE™.																		
SuperPole™ Ultra	Longer pole accommodates floor to ceiling range from 121"-140" / 307 to 356 cm. NOT TO BE USED WITH SUPERBAR™ OR SUPERTRAPEZE™.																		
Ceiling Plate Extender™	Allows standard ceiling plate 20" / 51 cm length to span 30" / 76 cm with holes for ceiling attachment to 24" / 61 cm ceiling beam centers. Sold separately.																		
Pole Material	Heavy gauge steel, 1.5" / 3.81 cm diameter. High temperature baked powder coat gloss white enamel.																		
Grip Material	Grey, premium high quality grip, 20" / 51 cm long. Does not contain natural dried rubber or latex. Washable.																		
Expansion Mechanism	Steel jackscrew, zinc plated, 1-1/8" fine cut thread.																		
Weight Capacity	250lbs / 113 kg. Heavy Duty weight capacity 450 lbs / 205 kg.																		
Assistance Level	<table border="1"> <tr> <td>M</td> <td colspan="4">ASSISTANCE LEVEL</td> <td>M</td> </tr> <tr> <td>I</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>A</td> </tr> <tr> <td>N</td> <td></td> <td></td> <td></td> <td></td> <td>X</td> </tr> </table>	M	ASSISTANCE LEVEL				M	I	1	2	3	4	A	N					X
M	ASSISTANCE LEVEL				M														
I	1	2	3	4	A														
N					X														